

NEW BME ACTIVECORE™

Bottom Mount / Glass Door Chiller

A new glass door chiller combining SKOPE's revolutionary new ActiveCore technology with a modern frameless aesthetic design. These models provide market leading energy savings along with new features to deliver optimal performance, efficiency and reliability.

Options:

- Available in 1 and 2 door models
- Additional shelves
- Illuminated sign panel

SIGNIFICANT ENERGY SAVINGS

Uses 35% less energy than the previous B1200G-2 model, saving more than \$266 per year*

QUIET

Significantly reduced noise and improved quality, for quieter operation

SHELF CLIP DESIGN

Patented easy to install shelf clip and numbered shelf support strip, reduces set up time and enables finer adjustments

AESTHETICS

A frameless glass door design with aluminium trim

BRANDING

Redesigned kick panel for branding opportunities and easy access to filter for maintenance

SECURITY

Fitted with lock tabs for extra security

PERFORMANCE

Optimal airflow and cooling performance reduces temperature variations and energy consumption

SPLIT SHELVING

Split shelving system for improved product presentation

SURFACE TECHNOLOGY INNOVATION

Premium energy efficient glass using a new low-emissivity, high performance coating technology, ideal for high humidity environments

EASY ACCESS

Ergonomically designed, brushed stainless steel handles

MAXIMUM COOLING

New slotted back panel design allows chilled airflow to be pushed directly on the product

PLUG + PLAY

Updated controller with manual light switch

INNOVATION

Revolutionary ActiveCore refrigeration system



Available in white only



Warranty
2 year protection



**High Energy
Efficiency**




ActiveCore™

*Based on 30 cents per kW.
Calculated using 4.55 kWh/24hr(TEC)
no illuminated sign panel

Specifications




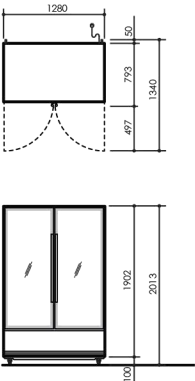
BME ActiveCore™ Display / Bottom Mount

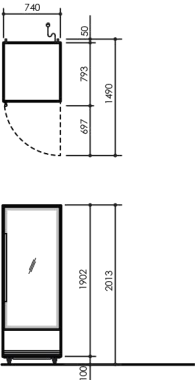

Integral front elevation


BME600-A - GLASS DOOR

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BME600-A	185	Integral	Chiller	
	Integral			Gross Volume 584 litres Total Shelf Area 1.62m ² Floor Area 0.62m ² (inc. 50mm stand-off)
	External (mm)	Internal (mm)		
Height	2013	1454		
Width	740	640		
Depth	843	602		
Door Height	1536			
Glass Area	0.92m ²			
<ul style="list-style-type: none">• 4.35 MEPS (kWh/24h/m²)• Maximum height 2207mm with optional sign panel fitted• +1°C to +4°C in 43°C ambient				
				BME600-A 1 DOOR



Integral front elevation

BME1200-A - GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	<div>Gross Volume 1079 litres Total Shelf Area 3.00m² Floor Area 1.08m² (inc. 50mm stand-off)</div>	<div> BME1200-A 2 DOOR</div>
BME1200-A	245	Integral	Chiller		
	Integral	Internal (mm)			
	External (mm)	Internal (mm)			
Height	2013	1454			
Width	1280	1180			
Depth	843	602			
Door Height	1536				
Glass Area	1.57 m ²				
<div><ul style="list-style-type: none">• 3.86 MEPS (kWh/24h/m²)• Maximum height 2207mm with optional sign panel fitted• +1°C to +4°C in 43°C ambient</div>					

ActiveCore Benefits

1. Designed for long-life, reliability and performance.
2. The interchangeable ActiveCore unit is used across all 1 and 2 door models, top and bottom mount models.
3. Redesigned airflow throughout the cabinet ensures optimal and efficient cooling of product.
4. Quick and easy servicing and maintenance, minimises downtime and disruptions.
5. New controller with built in Energy Management device.
6. Designed to be future proof, ready when regulations change around refrigerants and natural gases are implemented.
7. Maximises energy efficiency for significant savings over the life of the cabinet.

*Based on 30 cents per kW. Calculated using 4.55 kWh/24h(TEC) no illuminated sign panel.

Copyright © SKOPE Industries Limited. All rights reserved. SKOPE Industries Ltd reserves the right to alter specifications without notice. Visit www.skope.com for the most recent specification documents.

SIGNIFICANT ENERGY SAVINGS

