



### PRODUCT FEATURES

- Deck forced refrigeration
- Sliding Doors front and rear
- Double glazed
- Argon filled rear doors
- Three adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Integral condensor
- Self evaporating
- Solid glass front - optional

### CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4<sup>0</sup> factory set point

Model	Cabinet			Shelving no.	Display m <sup>2</sup>	Refrigerant	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm							
CD5RF9	900	750	1380	3 + base	1.42	134a	4.5 Amp	10amp 3 pin plug	144	240V

\* prior to installation see, installation guidelines, ventillation requirements and drainage options documents






#### ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

Maximum ambient operating

temperature climate class N max 32°C

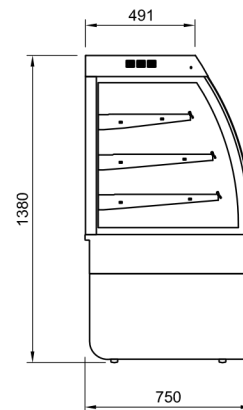

REAR VIEW



Complete Project Solutions™

CALL US ON 1300 355 769

VISIT OUR WEBSITE [www.totalce.com.au](http://www.totalce.com.au)



## PRODUCT FEATURES

- Deck forced refrigeration
- Sliding Doors front and rear
- Double glazed
- Argon filled rear doors
- Three adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Integral condensor
- Self evaporating
- Solid glass front - optional

## CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4<sup>0</sup> factory set point

Model	Cabinet			Shelving no.	Display m <sup>2</sup>	Refrigerant	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm							
CD5RF12	1200	750	1380	3 + base	1.97	134a	5.0 Amp	10amp 3 pin plug	235	240V

\* prior to installation see, installation guidelines, ventilation requirements and drainage options documents






### ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

Maximum ambient operating

temperature climate class N max 32°C

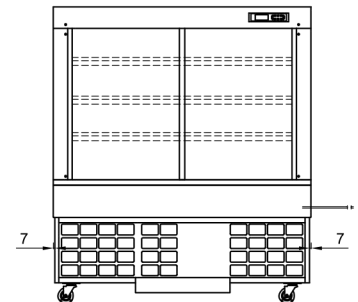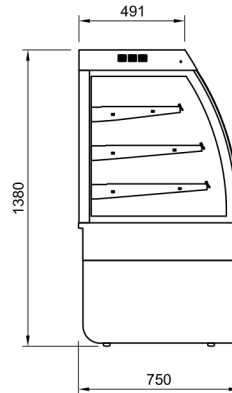

REAR VIEW



Complete Project Solutions™

CALL US ON 1300 355 769

VISIT OUR WEBSITE [www.totalce.com.au](http://www.totalce.com.au)



## PRODUCT FEATURES

- Deck forced refrigeration
- Sliding Doors front and rear
- Double glazed
- Argon filled rear doors
- Three adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Integral condensor
- Self evaporating
- Solid glass front - optional

## CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4<sup>0</sup> factory set point

Model	Cabinet			Shelving no.	Display m <sup>2</sup>	Refrigerant	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm							
CD5RF15	1500	750	1380	3 + base	2.5	134a	6.0 Amp	10amp 3 pin plug	282	240V

\* prior to installation see, installation guidelines, ventillation requirements and drainage options documents






### ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

Maximum ambient operating

temperature climate class N max 32°C

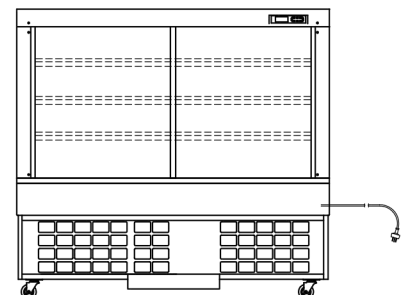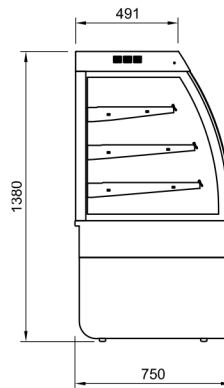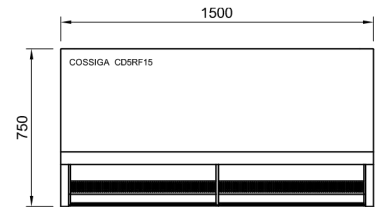

REAR VIEW



Complete Project Solutions™

CALL US ON 1300 355 769

VISIT OUR WEBSITE [www.totalce.com.au](http://www.totalce.com.au)