



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed ends
- Two adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Display m ²	Refrigerant	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm							
CD5OR9	900	750	1380	2 + base		134a	4.8 Amp	10amp 3 pin plug	104	240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents






ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

Maximum ambient operating

temperature climate class N max 32°C

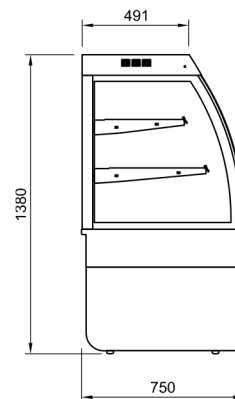

REAR VIEW



Complete Project Solutions™

CALL US ON 1300 355 769

VISIT OUR WEBSITE www.totalce.com.au



PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed ends
- Two adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Display m ²	Refrigerant	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm							
CD5OR12	1200	750	1380	2 + base		134a	5.8 Amp	10amp 3 pin plug	125	50/60 Hertz

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents






ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

Maximum ambient operating

temperature climate class N max 32°C

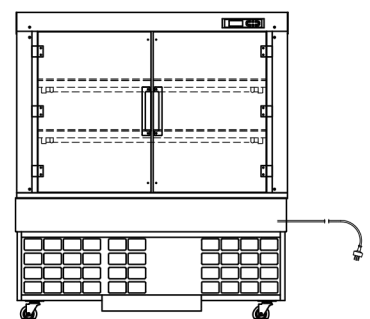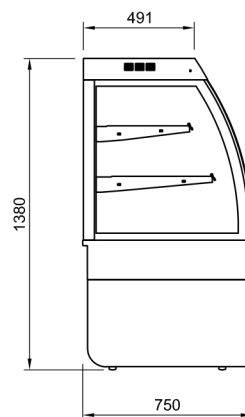

REAR VIEW



Complete Project Solutions™

CALL US ON 1300 355 769

VISIT OUR WEBSITE www.totalce.com.au