

PROFESSIONAL STACKED DRYERS

COMMERCIAL
RANGE

NSENX

Twin Stack
Dryer

2 x 10kg



FEATURES STACK UNITS

- Totally freestanding: can be installed on any floor and any level
- Reduced floor space
- 20kg capacity
- Door opens 180° for easy loading and unloading
- LED indication of the status of the program
- Time remaining countdown

FEATURES DRYERS

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Electrical or gas heating
- 4 drying programs
- LED indication of the status of the program



STACKED
UNIT




EASY
OPERATION


TYPE		DRYER
CAPACITY	kg	2 x 10
DRUM VOLUME	l	2 x 198
MOTOR	kW	2 x 0.25
DOOR TYPE		Solid
CYLINDER FINISH		Galvanised
CYCLE INDICATOR LIGHTS		Yes
ELECTRICAL CONNECTION		2 x 1x220-240V/50Hz

TYPE		NSENX
MODEL		dryer/dryer
HEAT SOURCE		electric
CONTROL		10 degree front
GAS BURNER	kW	N/A
HEATING		
HEATING ELEMENT	kW	2 x 3.1
CONNECTION		
GAS INLET CONNECTION	mm	N/A
GAS CONSUMPTION	BTU/hr	N/A
EXHAUST OUTLET DIAMETER	mm	102
EXHAUST AIRFLOW	l/s	2 x 60Hz: 105 (220) 50Hz: 85 (180)
OPERATION		
CYCLES		D4
TRANSPORT DATA		
NET WEIGHT	kg	125
SHIPPING WEIGHT	kg	132
DIMENSIONS H x W x D	mm	1986 x 683 x 737
PACKING DIMENSIONS H x W x D	mm	2032 x 864 x 760


Side View

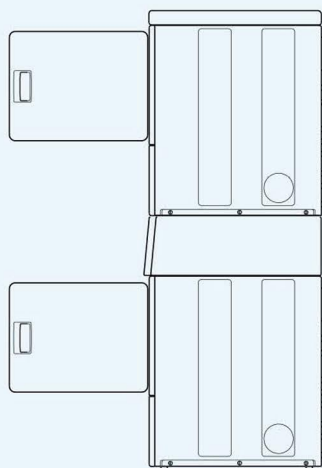

Back

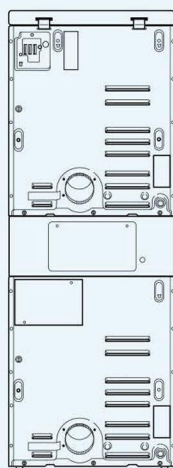

Front View

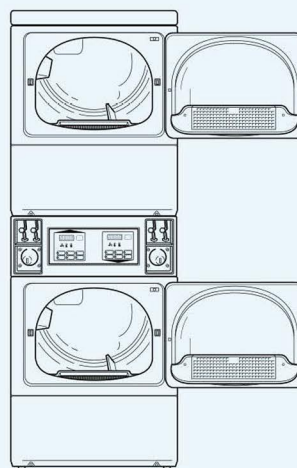

NSENX

VISIT OUR WEBSITE www.totalce.com.au
CALL US ON **1300 355 769**

Total
Commercial Equipment

Complete Project Solutions™

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

