

HIGH SPIN HYGIENIC BARRIER WASHER



**FXB
RANGE**

FXB 180 FXB 240 FXB 280

18KG 24KG 28KG
40LB 53LB 62LB



FEATURES


- Freestanding, high spin
- Complete stainless steel cabinet
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- Large door opening for easy loading & unloading
- Automatic door positioning
- Liquid soap connection
- USB plug (on the side panel)

OPTIONS

- Golden lock - patented inner door lock mechanism
- Liquid soap pumps
- Water recovery option incl. second drain valve
- Steam heating version
- Water sample tap
- Second Display (located on the clean side)
- OptiLoad® - Weighing system
- FPS (Fluctuating Power Supply) Protection
- End of cycle extra signaling (traffic light + siren)
- Lateral drain

XCONTROL FLEX PLUS PLATFORM

- 7", full color touch screen display with swipe function: very intuitive for users
- User-friendly screen with operating instructions built in as part of the control
- Complete control content available in 34 languages
- Wireless communication enabling programming
- Automated service reminders remind users to maintenance tasks
- Combine with Trace-Tech™ and i-Trace laundry management softwares for a perfect control of your laundry installation

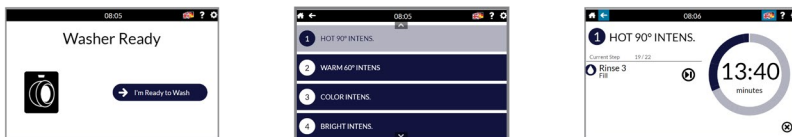

XControl FLEX PLUS approach, program, and cycle screens



ERGONOMICAL
CONSTRUCTION



LARGE DOOR
OPENING




LOW WATER
AND ENERGY
CONSUMPTION



GET AHEAD IN LAUNDRY

*Consult your sales representative for availability

TYPE		FXB180	FXB240	FXB280
CAPACITY				
Drum capacity (1:10)	kg/lb	18/40	24/53	28/62
Drum capacity (1:9)	kg/lb	20/44	27/60	31/68
Drum volume	l	180	240	280
Drum diameter	mm	Ø 750	Ø 750	Ø 750
Number of drums		1	1	1
Number of loading doors		1	1	1
Number of unloading doors		1	1	1
DRUM SPEED				
Washing speed	rpm	42	42	42
Highest spin speed	rpm	939	939	914
G-FACTOR				
		370	370	350
PROGRAMMER				
XControl FLEX PLUS		standard	standard	standard
CABINET				
Stainless steel		standard	standard	standard
HEATING				
Electricity (standard)	kW	12/18	18	21,9
Steam	bar	3-8	3-8	3-8
CONNECTIONS				
Electrical		1x 200-240V 50/60Hz 3x 200-240V 50/60Hz 3x 380-415V +N 50/60Hz 3x 380-415V 50/60Hz 3x 440-480V 50/60Hz 3x DN20 3/4" 1x DN15 1/2"		
Water inlet				
Steam inlet				
DIMENSIONS				
Size H×W×D	mm	1455×900×1145	1455×1020×1145	1455×1130×1145
Net weight	kg	430	460	490
TRANSPORT DATA				
Packed H×W×D	mm	1610×1010×1235	1610×1130×1235	1610×1240×1235
Gross weight	kg	485	515	550

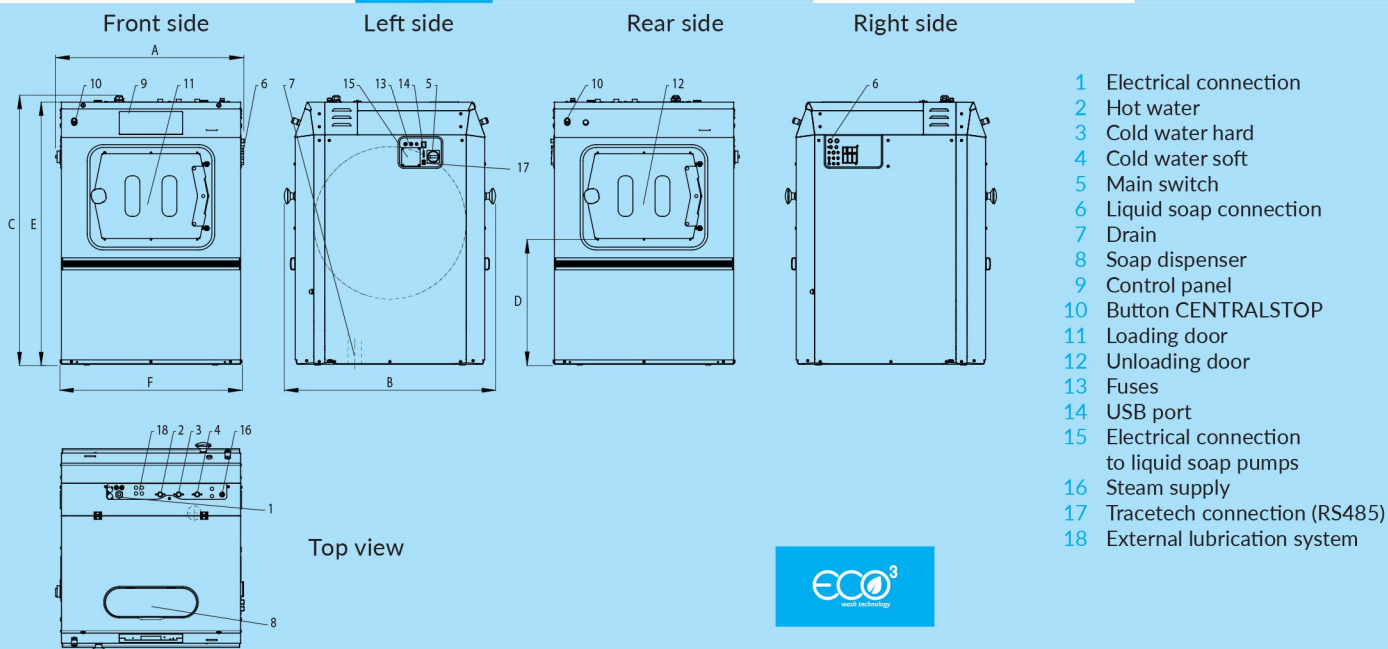

DIMENSIONS

	A	B	C	D	E	F
FXB180	900	1145	1455	655	1423	850
FXB240	1020	1145	1455	675	1423	970
FXB280	1130	1145	1455	670	1423	1080
	width	depth	height			

DIMENSIONS DOOR DIMENSIONS

	height	width
FXB180	325	376
FXB240	325	496
FXB280	325	496



CALL US ON 1300 355 769
VISIT OUR WEBSITE www.totalce.com.au

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.
www.primuslaundry.com

