



Electrolux

air-o-chill Blast Chiller-Freezer 10 1/1 50 kg with USB

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



air-o-chill

Blast Chiller-Freezer 10 1/1 50 kg with USB

727669 (AOFPS101CX)

Blast chiller/freezer 50/50kg,
10xGN1/1 or 600x400mm (36
levels pitch 20mm) - USB

Short Form Specification

Item No.

For 10 GN1/1 or 600x400 mm trays. Up to 18 ice cream basins 5kg (mm 165x360x125h). 36 levels, pitch 20mm. Load capacity: chilling 50 kg; freezing 50 kg (UK guidelines). Compatible with Zanussi, Alpeninox and Rational SCC Lengthwise ovens. Main components in 304 AISI stainless steel. Internal rounded corners and drain. Built-in refrigeration unit. Cruise cycle for fully automatic blast chilling with food probe. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real residual time estimation (A.R.T.E.). Turbo cooling function. Specific cycles for ice cream. Evaporator with antirust protection. Digital temperature and time display. HACCP and Service alarms with data logging. Operating air temperature: +90 -41°C. For ambient temperatures up to 32°C. Cyclopentane insulation (HCFC, CFC and HFC free). R404a refrigerant gas (HCFC and CFC free).

Main Features

- Blast Freezing cycle: 50 kg from 90°C up to -18°C in less than four hours.
- Blast Chilling cycle: 50 kg from +90°C up to + 3°C in less than 90 minutes.
- Soft Chilling (air temperature 0°C).
- Hard Chilling (air temperature -20°C).
- Shock freezing (low air temperature adjustable up to -41°C).
- Holding at +3 °C for chilling or -22 °C for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Cruise cycle: the chiller automatically sets the parameters for the quickest and best chilling (it works by probe).
- Two specialized cycles:
P1 brings down ice-cream temperature to -14°C (measured at the core when probe is inserted). Once set temperature is reached, the temporary maintenance phase automatically begins, holding the -14°C temperature.
P2 sets temperature to -36°C / -40°C for an indefinite amount of time, maintaining the ventilation active. Temperature is adjustable up to -40°C without interrupting the cycle, allowing ice-cream to be kept longer in the freezer.
- Control unit provides several operating settings (programmable parameters): time/core temperature according to NF and UK regulations, time/air temperature/probe personalized according to national regulations, sterilizing cycle: UV lamps built-in (on request), 3 single sensor or 3-sensor temperature probes (as accessory), ideal for meats, automatic defrosting and manual defrosting.
- 3-sensor core probe as standard and automatic detection of the core probe insertion.
- Probe-driven cycles feature ARTE (Algorithm for Remaining Time Estimation) to make planning the activities easier.
- Control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- Audible alarm starts when the cycle ends or terminates abnormally.
- All information related to the different operating models are recorded: date, time, cycle, core temperature, holding temperature, HACCP accordance.
- Multi-purpose internal structure is suitable for 10 grids GN 1/1 (36 positions available with 20 mm pitch) 10 grids or trays 600 x 400 mm (36 positions available with 20 mm pitch) or 18 ice-cream basins of 5 kg each (h 125 x 165 x 360).
- USB connection: to download HACCP data from the blast chiller (time, cavity temperature, alarms, and probe temperature).
- Performance guaranteed at ambient temperatures of +32°C.

APPROVAL: _____



Electrolux

Blast Chiller-Freezer 10 1/1 50 kg with USB
air-o-chill

- Chilling and freezing times can vary according to food quantity, density, moisture contents and type of containers. Chilling capacity according to NF regulations is 36 kg.

Construction

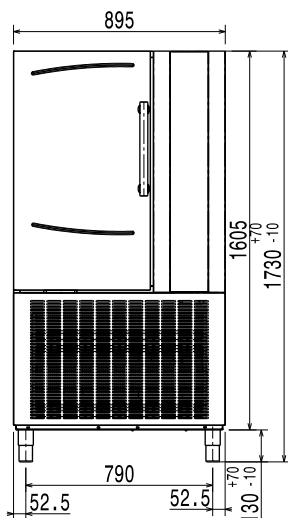
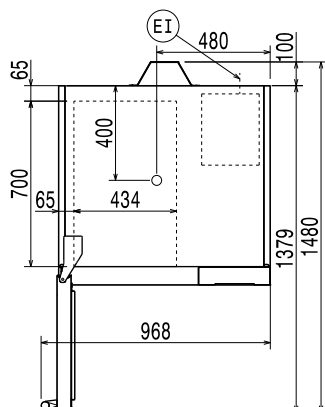
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.
- Main components in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator with antirust protection.
- Motors and fan waterproof protected IP23.
- PC connection on request, gate RS 485.
- Stand alone printer as accessory.
- Inner cell with fully rounded corners.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Environmentally friendly: R404a as refrigerant fluid.
- No water connections required.
- Removable magnetic gasket door with hygienic design.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Automatic heated door frame.
- Solenoid valve included.

Included Accessories

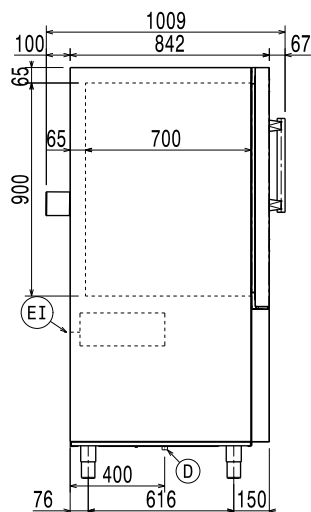
- 1 of 3-sensor probe for blast chiller and blast chiller/freezers PNC 880212
- 2 of Set of 5 stainless steel runners for blast chiller LW 30 and 50kg PNC 880312

Optional Accessories

- 4 wheels for 30 kg blast chillers, 30/25 kg blast chiller/freezers PNC 880111 ☐
- Kit for HACCP advanced connection for LW and CW blast chiller&freezer PNC 880183 ☐
- 3-sensor probe for blast chiller and blast chiller/freezers PNC 880212 ☐
- 1 single-sensor probe for blast chiller and blast chiller&freezers PNC 880213 ☐
- 2 extra single-sensor probes for blast chiller/freezers PNC 880214 ☐
- Kit of 3 single sensor probes for blast chiller/freezers PNC 880215 ☐
- Pastry rilsan grid for blast chiller, lengthwise (600x400mm) PNC 880294 ☐
- Set of 5 stainless steel runners for blast chiller LW 30 and 50kg PNC 880312 ☐
- Slide-in rack support for 10x1/1GN blast chiller & freezer, 50kg PNC 881028 ☐
- Plastic coated grid 1/1GN PNC 881061 ☐
- Printer for HACCP basic version (for cabinets and counters with electronic control) PNC 881532 ☐
- Pair of 1/1GN AISI 304 stainless steel grids PNC 921101 ☐
- Trolley for 6&10x1/1GN ovens and bcf PNC 922004 ☐
- Tray rack with wheels for 10x1/1GN ovens and bcf, 65mm pitch (std) PNC 922006 ☐
- Tray rack with wheels for 8x1/1GN ovens and bcf, 80mm pitch PNC 922009 ☐
- Rack for 30 plates for 10x1/1GN ovens and bcf, 65mm pitch with wheels PNC 922015 ☐
- Pastry tray rack with wheels, for 10x1/1GN ovens and bcf, 80mm pitch (8 runners). Suitable for 400x600mm pastry trays PNC 922066 ☐

Front

Top


D = Drain
 EI = Electrical connection
 RO = Refrigerant Outlet

Side


Electric

Supply voltage: 727669 (AOFPS101CX) 380-415 V/3N ph/50 Hz
Electrical power max.: 4.26 kW
Defrost Power: 4.25 kW
Circuit breaker required

Installation:

Clearance: 5 cm on sides and back.
 Please see and follow detailed installation instructions provided with the unit

Key Information:

Door hinges: Left
External dimensions, Height: 1730 mm
External dimensions, Width: 895 mm
External dimensions, Depth: 1009 mm
Net weight: 240 kg
Shipping weight: 274 kg
Shipping volume: 1.9788 m³

Refrigeration Data

Refrigerant type: R404a
Refrigeration power: 2540 W
Refrigeration power at evaporation temperature: -30 °C
Refrigerant weight: 4500 g

Product Information (Commission Regulation EU 2015/1095)

Energy consumption, cycle (chilling): 0.073 kWh/kg
Chilling Cycle Time (+65°C to +10°C): 70 min
Full load capacity (chilling): 50 kg
Energy consumption, cycle (freezing): 0.221 kWh/kg
Freezing Cycle Time (+65°C to -18°C): 254 min
Full load capacity (freezing): 50 kg