



XU Economy Undercounter Dishwasher W 575mm x D 600mm x H 845mm

Washtech's XU is a versatile, highly efficient, simple-to-use and easy-to-maintain undercounter dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XU provides excellent wash results in less time, while being light on operating costs and the environment.

The XU features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

Standard Features

- QuikStart 1 and 2 minute wash cycles
- Washes up to 1,080 plates per hour/1,500 glasses per hour
- Low hot water consumption of 2.2 litres per cycle
- Washtech Hybrid Controls
- Self-cleaning cycle
- QuikConnect (Plug & Play) installation, supplied complete with:
 - Water supply hoseDetergent and rinse aid pumps with injector lines
 - Detergent and tinse aid pumps wit
 Drain pump with outlet hose
 - 15 amp plugset
 - No commissioning required
 - Heavy-duty stainless steel construction
- Upper and lower wash/rinse arms with precision moulded jets
- Easy-clean composite wash filter
- Watermark approved backflow prevention
- Comprehensive 5-2-1 warranty

Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)












XU Economy Undercounter Dishwasher W 575mm x D 600mm x H 845mm

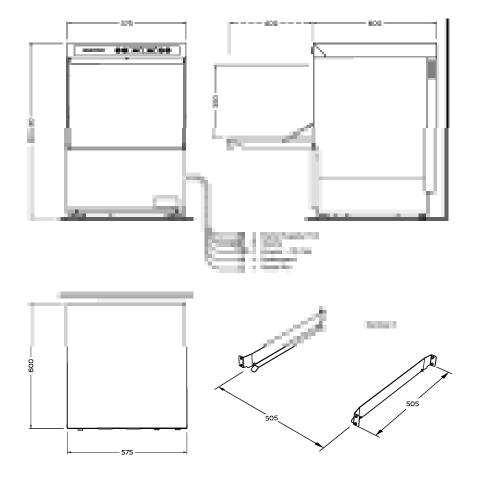

Α	Hot water				Dimensions	Machine	Packed	
	Temperature	65°C				Width	575	720
	Connection	3/4" male; hose supplied				Depth	600	690
	Pressure	200-350kPa				Height	845	970
	Flow	20 litres per min				Weight	60	77
	Quality	Pota	ble -	refer table	2	Cubicmetres		0.48
	Backflow Prevention	Atmo	osphe	eric Vacuur	m Breaker			
	Consumption	2.2 li	tresp	per cycle*		Water Quality	Min	Max
						pН	7	8
в	Waste					Hardness ppm	20	100
	Connection	Hose supplied for 38mm open standpipe 750 high				Cl-		100
						SO ₄		400
		or co	nneo	ction to sin	k trap	Fe		0.1
						Mn		0.5
с	Electrical	v	Hz	A/phase	max kW	Cu		0.05
	Single Phase	240	50	15	3.37	Cl ₂		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. *Consumption may vary with site conditions.

an Ali Group Company







Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

New South Wales Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



ISO9001 All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1903