QUANTITY

ITEM NO

Open Fryers with auto lift



OGA 322 2-well gas auto lift open fryer

Henny Penny open fryers offer high-volume, integral multi-well frying with programmable operation, oil management functions and fast, easy filtration.

Henny Penny auto lift open fryers automatically raise the load out of the fry vat when cooking is complete. The auto-lift feature promotes perfect results without constant monitoring and can significantly increase productivity in lightly staffed operations.

A proprietary heat-exchange design enables the OGA 320 series gas open fryers to recover temperature very quickly and earn the ENERGY STAR® mark for energy efficiency. Fast recovery translates into higher throughput, lower energy costs and longer frying oil life.



OGA 321 1-well gas OGA 322 2-well gas OGA 323 3-well das

Heavy duty stainless steel vats come with a 7-year warranty-the best in the business.

Henny Penny open fryers have a built-in filtration system that filters and returns hot frying oil in minutes. No separate pumps and pans, no handling hot oil. Frequent filtering extends frying oil life, improves product quality and reduces oil costs.

The Computron[™] 8000 control features automatic, programmable operation, as well as energy-saving, filtration and cook management functions.

Standard Features

- Heavy-duty stainless steel vats with 7-year warranty
- Rugged direct drive lift mechanism 4 heavy-duty casters, 2 locking powered by quiet, low-voltage motor
- Motor and drive built into existing cabinet-footprint NOT increased
- Two lifters per well programmed to operate half baskets independently or together at the touch of a button
- High-efficency burners with solid state ignition
- High reliability heat-exchange design for energy efficiency and fast recovery
- Cold zone below burners helps extend oil life
- High-limit temperature protection
- Built-in filtration system
- Easy basket set and release

- Stainless steel construction for easy-cleaning and long life
- Computron[™] 8000 control
 - 10 programmable cook cycles
 - Melt mode
 - Idle mode
 - Clean-out mode
 - Load compensation
 - Proportional control
 - Optional filter prompt and customizable filter tracking
 - 16-character digital display with multiple language settings

Accessories shipped with unit

- Fry baskets-please select one □ 1 full basket per well
- □ 2 half baskets per well 1 basket support for each vat
- Filter screeen and filter envelope

Options available separately

- □ Fryer Shortening Shuttle[®]
- □ Filter rinse hose
- □ Fry well covers

	LI APPROVED AS NOTED	
APPROVED	APPROVED AS NOTED	C RESUBM

AUTHORIZED SIGNATURE


DATE



© 2008 Henny Penny Corporation, Eaton, OH 45320 USA Revised 02282019

Open Fryers with auto lift

OGA 321 1-well gas OGA 322 2-well gas OGA 323 3-well gas

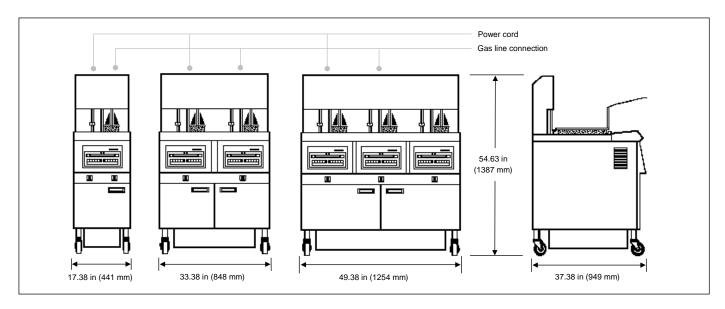

74.7 kW

1.00 in gas line

	OGA 321		OGA 322	OGA 322		OGA 323	
Dimensio	ns						
Width	17.38 in	(441 mm)	33.38 in	(848 mm)	49.38 in	(1254 mm)	
Depth	37.38 in	(949 mm)	37.38 in	(949 mm)	37.38 in	(949 mm))	
Height	54.63 in	(1118 mm)	54.63 in	(1387 mm)	54.63 in	(1118 mm)	
Crated							
Length	40 in	(1016 mm)	40 in	(1016 mm)	55 in	(1397 mm)	
Depth	25 in	(635 mm)	39 in	(991 mm)	39 in	(991 mm)	
Height	65 in	(1651 mm)	65 in	(1651 mm)	65 in	(1651 mm)	
Volume	38 ft ³	(1.1 m ³)	59 ft ³	(1.7 m ³)	81 ft ³	(2.3 m ³)	
Weight	336 lb	(152 kg)	529 lb	(240 kg)	707 lb	(321 kg)	
Heating natural or liquid petroleum							
2 burners 85,000 BTU/hr			4 burners 170,000 BTU/hr		6 burners 255,000 BTU/hr		

49.8 kW

0.75 in gas line

85,000 BTU/hr 24.9 kW

0.50 in gas line

Oil capacity

65 lb or 30 L per vat

Required clearances

Sides	4 in	(102 mm)
Back	4 in	(102 mm)
Front	30 in	(762 mm) remove filter pan

Electrical

Volts	Phase	Hertz	kW	Amps	Wire	Cord & Plug Not available for all destinations
120	1	60	N/A	12.0	2+G	Please contact
230	1	50		2.5	1NG	Henny Penny



*Units shipped without power cord and plug must have power cord and plug installed on site by a qualified electrician.

Continuing product improvement may subject specifications to change without notice.

© 2008 Henny Penny Corporation, Eaton, OH 45320 USA Revised 02282019

24 Hour Technical Support: Henny Penny Technical Service 800 417.8405 technicalservices@hennvpennv.com

Bidding Specifications

Provide Henny Penny model OGA 321, 322, or 323 gas auto lift open fryer with built-in filtration system.

- Unit shall incorporate: Programmable auto lift mechanism with two lifters at each well
- Computron[™] 8000 control system with programmable or manual operation, LED digital display, idle and melt modes, load compensation, filtration tracking and 7-day history
- Fry vats of heavy duty stainless steel with 7-year ٠ warranty
- Unit qualifies for the ENERGY STAR® mark
- 4 heavy-duty casters, 2 locking

Henny Penny Corporation PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417 +1 937 456.8434 Fax 800 417.8434 Fax www.hennypenny.com

