

TUMBLE DRYERS XCONTROL FLEX



**DX
RANGE**

DX 13/13

2X14KG
2X30LB

DX 20/20

2X20KG
2X45LB




PLATFORM: XCONTROL FLEX / XCONTROL FLEX PLUS

- ☒ 5" on stack tumbler dryers, full color, touch screen display
- ☒ Clear step-by-step instructions available for easier operation
- ☒ Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- ☒ VEND:
 - 5 standard dry programmes (High, Medium, Low, Delicate, No Heat)
 - 11 easy-to-use cycle modifier
- ☒ Count up timer
- ☒ Over-the-air updates

FEATURES

- ☒ Double capacity on the same floor space
- ☒ Gas and Electrical heating (DX13/13)
- ☒ Large door opening for easy loading and unloading (DX 13/13 Ø 57cm, DX 20/20 Ø 68cm)
- ☒ Galvanized drum
- ☒ Axial airflow
 - Drum perforations only at the front and back
 - Maximum airflow, less energy consumption and short drying times
- ☒ Self cleaning large lint filter for easy removal and efficient drying
- ☒ Stainless steel drum
- ☒ Stainless steel front panel with black painted door
- ☒ Grey painted side panels
- ☒ Coin operated version
- ☒ Reversing drum: prevents linen from tangling
- ☒ SafeTech™ Fire Suppression System as an option
 - Prevents early laundry fire by constantly monitoring the temperature in the drum
 - In case of excessive temperature, linen is sprayed with water

TYPE		DX13/13	DX20/20
CAPACITY			
Capacity	kg	2x14	2x20
Drum volume	l	2x300	2x420
Drum diameter	mm	Ø 762	Ø 838
AIRFLOW			
Airflow	l/s	380	570
DRYING AVERAGE			
Gas heating	g/min	294	385
Electric heating	g/min	258	-
MOTOR			
Fan	kW	2x0,4	2x0,4
Drive	kW	2x0,2	2x0,4
GAS HEATING			
Energy (per pocket)	kW	21,4	27,8
Energy (per pocket)	kBTU/h	73	95
Electrical connection		1x100-120V/50-60Hz, 1-3x200-240V/50-60 Hz 3x440-480V/50-60Hz, 3x380-415V/50-60Hz	
Gas connection (one manifold)	NPT	½"	½"
ELECTRICAL HEATING			
Energy (per pocket)	kW	21	-
Electrical connection		3x230-240V/50-60Hz 3x380V/50-60Hz, 3x400-415V/50-60Hz, 3x460-480V/50-60Hz	
EXHAUST			
	Ø /mm	1x200	1x250
DIMENSIONS			
Size H×W×D	mm	1940×800×1090	2065×875×1235
Net weight (E, G, S)	kg	300, 260, 275	-, 320, -
TRANSPORT DATA			
Packed (foil) H×W×D	mm	2030×830×1190	2160×900×1370
Gross weight (foil E, G, S)	kg	300, 270, 290	-, 340, -
Packed (crate) H×W×D	mm	2210×900×1270	2210×1020×1520
Gross weight (crate E, G, S)	kg	360, 330, 350	-, 420, -

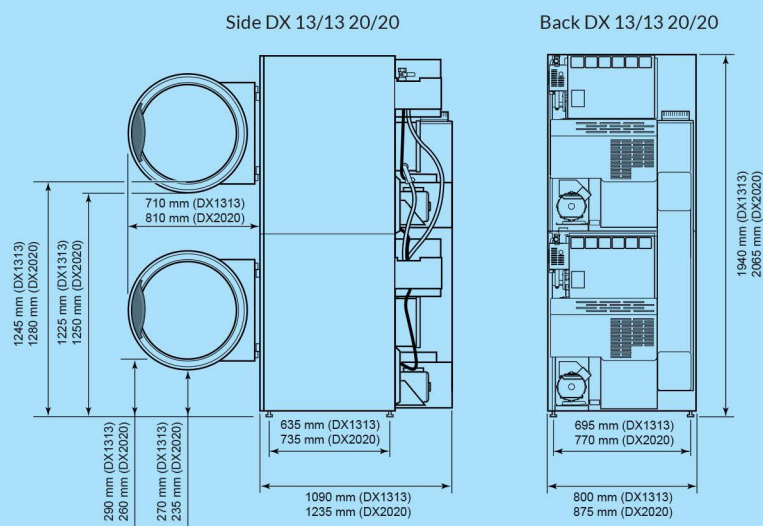

Total
Commercial Equipment

Complete Project Solutions™

CALL US ON 1300 355 769
VISIT OUR WEBSITE www.totalce.com.au

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.
www.primuslaundry.com

Primus by Alliance Laundry Systems

